TEXAS PNEUMATIC TOOLS, INC.

PRODUCT LINE SHEET

AIR MOVEMENT

- **TX-3AMS, TX-6AMS;** Shorter galvanized sheet metal horns for use in limited space
- **TX-3AM, TX-6AM, TX-8AM, TX-10AM;** Galvanized sheet metal horns
- **TX-3AMS-P, TX-3AM-P, TX-6AM-P, TX-8AM-P & TX-10AM-P;** Electrically conductive polymer horns
- **TX-3AMS-SH, TX-3AM-SH. TX-6AM-SH, TX-8AM-SH & TX-10AM-SH;** Stainless steel horn and aluminum base
- **TX-6AM-SS;** All stainless steel horn and base; ***Only all stainless steel air mover on the market***
- Field ready with ground wire and crow foot connector
- Air flow rates independently tested to AMCA Standard 210
- Made in USA

AIR MOVER STAND

- 4-leg design for maximum stability
- Can be used with all sizes of air movers
- Adjustable range of angles (55° up or down)
- Air movers sold separately

DUCTING

TX-SAC-N-GO

in 8”, 12”, 16”, 20” & 24” sizes

- Storage bag stays attached
- No additional parts needed for linking units together
- 8” unit for use with all types TX-3AM and TX-3AMS
- 12” unit for use with all types TX-6AM and TX-JF12
- 16” unit for use with all types TX-8AM, TX-10AM and TX-JF16
- Electrically conductive (groundable) SAC-N-GO Ducting also available (black)
- Larger sizes available as special order

JET FANS

TX-JF24, TX-JF20, TX-JF16, TX-JF12

- Most powerful and reliable compressed air driven fans on the market
- 20” and 24” units fit API tank flanges
- All components aluminum or stainless
- Air flow rates independently tested to AMCA Standard 210
- Highest air flow rates compared to any competitive products
- Made in USA

SWING GATES

TX-SG20, TX-SG24

- Can be used with flanges in any orientation and multiple pressure ratings
- TX-SG20 can be used on 20” or 24” tank flanges
- All aluminum or stainless components
- Made in USA
- Magnetic closure device
- Fans sold separately

WATER DRIVEN MARINE BLOWERS

TX-WD12, TX-WD16

- Stainless water motor with brass impeller
- Optional exhaust blade for exhaust operation
- Rugged cast aluminum housing
- Air flow rates independently tested to AMCA Standard 210
- Also available with air motor for compressed air operation

MANIFOLDS

TX-2AMF (15 gal), TX-3AMF (2.5 gal), TX-4AMF (30 gal), TX-5AMF (60 gal), TX-6AMF (10 gal), TX-10099 (safety cage)

- Helps maintain a cleaner/safer work site
- Meets OSHA and ASME code guide lines
- Made in USA
- Optional safety cage (TX-10099) for TX-2AMF & TX-6AMF
- Use with Moisture Separating Systems for clean, dry compressed air

MOISTURE SEPARATING SYSTEMS

TX-MSS-400

TX-MSS-800

TX-MSS-1600

- Eliminates moisture from the compressor with four levels of separation
- No moving parts to maintain
- Deliquescent desiccant for added drying
- Multiple outlets
- Use in combination with additional Manifolds or Portable FRL Systems

LUBRICATORS

TX-1/4L, TX-0L, TX-1L, TX-2L, TX-3L,
TX-0L-F, TX-1L-F, TX-2L-F, TX-2L-CF, TX-3L-CF

- In-Line lubricators and filter-lubricators from 1.05 fluid ounce to 16 fluid ounce capacity
- Pressure fed and constant feed types available
- Adjustable metering valve
- Made in U.S.A.

HOSE WHIP ASSEMBLIES

- Numerous configurations available
- 300 psi hose, 500 psi hose, 1000 psi hose, and hydraulic hose (2000 psi)
- Custom whips available

SCALERS

Needle & Chisel

TX1B, TX182, and TX456 Series
Chisel and Needle Scalers

- Lever throttle, Push throttle, and Coke oven models available
- Vacuum attachments available
- Made in USA

CHIPPING HAMMERS

TX-CH-4B, TX-CH

- 2", 3", and 4" stroke available
- Round or Hex Bushing
- 4-bolt style includes lubricator with hose whip, quick change retainer and 12" moil point and flat chisel
- Made in USA

RIVET BUSTERS

TX-133-RB (Inside Trigger)
TX-133-RB-OT (Outside Trigger)

- Shipped with filter/lubricator hose whip - (TX-8HW-F-1/2) and 12" moil point and flat chisel
- 6", 8", and 11" stroke
- Safety bridge for piston retention
- Made in USA

PISTON SCALERS

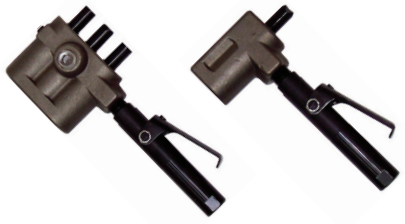

T3 — Triple Piston Scaler
S1 — Single Piston Scaler

- Removes rust, paint, cement and industrial coatings from steel, or can be used to rough concrete prior to resurfacing
- Rugged forged steel body
- Optional REXALLOY™ or carbide tipped pistons
- Optional handle version or air cock handle
- Made in USA

LONG REACH SCALERS

TX2LTCS, TX2PTCS, TX2LRCS

- Heavy hitting 2” stroke
- 48” - 60” long
- For tile and non-skid removal
- Made in USA

CLAY DIGGER

TX30CD (30lb)

- Rugged construction
- 2 chuck sizes available (7/8” x 3-1/4” or 1” x 4-1/4”)
- Clay spades and asphalt cutters available

RAMMERS

TX-00 & TX-70B — Sand Rammers
TX-8-2½” & TX-8-4” — Bench Rammers

- Easy start/stop features
- Optional non-revolving pistons available
- Shipped with a rubber butt
- Made in USA

BACKFILL TAMPER

TX6TN

- Compacts soil around footings and trenches
- Comes with 6” malleable iron butt
- Made in USA

PAVING BREAKERS

TX30PB (30lb), TX40PB (40lb), TX60PB (60lb), and TX90PB (90lb)

- Rugged Thor-type tools
- Multiple chuck sizes

ROCK DRILLS

TX-18D (18lb Drill), TX-29RD (29lb) & TX-60RD (60 lb) Rock Drills

- Rugged construction
- Shipped with lubricator and hose whip assembly
- Multiple chuck sizes

NEW PRODUCT

PNEU-LIGHT

- Intrinsically safe
- Compressed air driven
- LED life expectancy – 10,000 hours
- T6 - aircraft grade aluminum housing
- Can operate at a large range of air pressures (40-120 psi)
- Extremely reliable design
- Sealed bearings for extended life
- Floodlight pattern for maximum visibility
- ATEX certification applied for

NEW PRODUCT

DUST COLLECTION SYSTEMS

- Conforms to OSHA standard 1926.1153
- Filters down to .3 microns with 99.97% efficiency
- The systems can be located within a 30' radius from work area to lessen possible silica exposure
- The cyclonic pre-separator removes more than 90% of dust and debris prior to the HEPA filter
- Works with all air powered tools or electric tools
- Portable and easily manuvered around work site
- HEPA filter has a 2 to 3 year life expectancy and can be washed
- The dirt and debris can be thrown away (no wet slurry that requires additional disposal practices and costs)
- Virtually maintenance free (no moving parts)
- Made in USA

ACCESSORIES

- Grinding aids
- Safety lock cables, check valves, air hose fittings
- Hose swivels and hose connectors
- Screened inlet bushings
- Air tool oil, air tool flush

AIR SCRIBE

TXAS1

- Flexible 8 ft. hose and filter
- Carbide tipped stylus
- Adjustable speed
- Made in USA

ARROW TOOLS

- Retainers
- Sleeves
- Springs
- Bumpers
- Chisels and Points for Scalers, Chipping Hammers, Rivet Busters, Paving Breakers and Rock Drills

NEW PRODUCT

TORNADO BLOWERS

- Tornado 8, 12 & 16 EXP units are supplied with explosion proof motor with internal on/off switch (NEMA CLASS 1, DIV.1, GROUP D & CLASS 11, GROUP E, F & G)
- Tornado 12 EXP units are approved and certified by American Bureau of Shipping (ABS).
- Heavy gauge, rolled and welded steel housings. No casting to break or crack.
- Rugged steel outlet adapter with welded guide vanes to eliminate rattling and insure a quality product for many years of trouble free service.
- Polymer fan blades standard. Solid Aluminum fan blades are optional.
- Motors are rated for 115v or 230v single phase and 50/60 hertz. Higher voltages and 3-phase motors also available.
- Motor voltage easily changed from 115v to 230v by a single switch located on the rear of the motor housing.
- All explosion proof units are assembled with explosion proof junction boxes, cords and explosion proof plugs.
- All TEFC units are assembled with weatherproof junction boxes, cords and plugs.
- Stainless steel bolts and powder coated housing for longer service life.
- Available Accessories:
  Dual Inlet Adapter
  Tote Cart with Straps
  SAC-N-GO Ducting (8", 12" or 16" Diameter) (conductive - black and non-conductive - yellow)
  Air Mover Stand

NEW PRODUCT

MAN COOLERS

- Available in 18", 24", 36" and 48" diameters.
- Heavy gauge, rolled and welded steel housings. No castings to break or crack.
- Polymer fan blades standard. Solid aluminum fan blades are optional.
- Explosion proof or totally enclosed electric motors rated for 115v or 230v single phase and 50/60 hertz. Higher voltages and 3-phase motors also available.
- Explosion proof motors rated for NEMA CLASS 1, DIV.1, GROUP D & CLASS II, GROUP E, F & G.
- All explosion proof units are assembled with explosion proof junction boxes, cords and explosion proof plugs.
- All TEFC units are assembled with weatherproof junction boxes, cords and plugs.
- Stainless steel bolts and powder coated housing for longer service life.
- Heavy duty casters are standard on all units.
- Wall mounts or stands are also available for all unit sizes.

www.airtools.com **Email: tptinfo@airtools.com**

TEXAS
1-800-231-9740
254-587-2533 (Int'l calls)

NEVADA
1-800-858-1222

VIRGINIA
1-800-626-1091